

## ENVIRONMENTAL PRODUCT DECLARATION

# BOLLO CLASSIC/BS CLASSIC AND BOLLO STRONG/BS STRONG

RUBBER FLOORING TECHNOLOGY  
RESILIENT FLOOR COVERING



Solid colour rubber flooring in tiles with studded surface

artigo  
by MONDO

Rubber is a unique raw material with great elasticity and stress resistance, making it the ideal material for producing high-performance flooring that is perfect for a wide variety of indoor public spaces, such as schools, hospitals, laboratories, offices, museums, and more. In addition to its unmatched technical characteristics and durability, rubber flooring offers endless creative and tasteful design solutions. With a passion for innovation, quality, and beauty, we pride ourselves on being a reliable partner and offering flooring solutions that represent excellence for any of your projects.

For more information visit:

[www.artigo.com](http://www.artigo.com)

[www.mondocontractflooring.com](http://www.mondocontractflooring.com)





**BOLLO CLASSIC/BS CLASSIC AND BOLLO STRONG/BS STRONG**  
RESILIENT FLOOR COVERING

According to ISO 14025,  
EN 15804 and EN 16810

EPD PROGRAM AND PROGRAM OPERATOR NAME, ADDRESS, LOGO, AND WEBSITE	UL Solutions 333 Pfingsten Road, Northbrook, IL 60611	<a href="http://www.ul.com">www.ul.com</a> <a href="http://spot.ul.com">spot.ul.com</a>
GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER	General Program Instructions v.2.4 July 2018	
MANUFACTURER NAME AND ADDRESS	Artigo Spa – Loc. Carpeneto, 17014, Cairo Montenotte (Sv), Italy (part of MONDO group)	
DECLARATION NUMBER	4790957837.107.1	
DECLARED PRODUCT & FUNCTIONAL UNIT OR DECLARED UNIT	1 m <sup>2</sup>	
REFERENCE PCR AND VERSION NUMBER	EN 15804+A2:2019+AC & EN 16810:2017	
DESCRIPTION OF PRODUCT APPLICATION/USE	Resilient rubber flooring is classified in accordance with ISO 10874 and in reference to the FCSS to be installed in the following areas of application: Domestic 23, Commercial 34, Industrial 42	
MARKETS OF APPLICABILITY	Global	
DATE OF ISSUE	June 23rd, 2025	
PERIOD OF VALIDITY	5 years	
RSL	1 year	
EPD TYPE	Product-Specific Type III EPD	
EPD SCOPE	Cradle to grave	
YEAR(S) OF REPORTED PRIMARY DATA	2023	
LCA SOFTWARE & VERSION NUMBER	SimaPro v. 9.5.0.0	
LCI DATABASE(S) & VERSION NUMBER	Ecoinvent v. 3.8	
The PCR review was conducted by:		European Standards
		CSN EN 15804+A2 <a href="mailto:Info@en-standard.eu">Info@en-standard.eu</a>
This declaration was independently verified in accordance with ISO 14025: 2006. <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL  This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:		<i>Cooper McCollum</i> Cooper McCollum, UL Solutions
		 Sung Mo Yeon, H.I.P. Pathway

#### LIMITATIONS

**Exclusions:** EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc.

**Accuracy of Results:** EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any particular product line and reported impact.

**Comparability:** EPDs from different programs may not be comparable. Full conformance with a PCR allows EPD comparability only when all stages of a life cycle have been considered. However, variations and deviations are possible. Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.



According to ISO 14025,  
EN 15804 and EN 16810

## 1. Product Definition and Information

### 1.1. Description of Company/Organization

Artigo develops and produces innovative and high-performance rubber flooring that stems from research work that began with the Pirelli Group in the 1920s, later converging with the MONDO Group, established in 1948 and now a world leader in rubber flooring for commercial and sport applications. The joining of two industrial cultures has produced a vast and diverse collection, with an exceptional number of different applications.

The company is dedicated to upholding the highest standards that honour both the environment and society. This commitment is reflected in the long-lasting, high-quality flooring we offer, which respects the environment in all its facets. Artigo ensures strict oversight of production, carefully selects raw materials, and holds prestigious international certifications for their finished products, all of which serve as evidence of our environmental dedication.

Artigo's factory conforms to the following Standards:

- ISO 9001 Quality Management Systems;
- ISO 14001 Environmental Management Systems;
- ISO 14064 Greenhouse Gas (GHG) Quantification and Reporting;
- ISO 50001 Energy Management Systems.

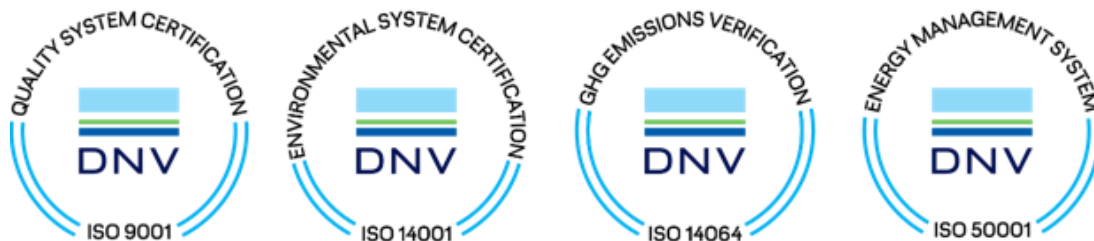


Figure 1 Artigo Certifications

### 1.2. Product Description

#### Product Identification

Product Designation: Bollo BS Rubber Flooring - named: Bollo Classic/BS Classic and Bollo Strong/BS Strong, produced by Mondo Spa for Artigo Spa

This environmental product declaration covers the collection of resilient flooring by Artigo Spa. These products come in solid colours with studded surface.

#### Product Specification

Product characteristics are listed in Table 2, Table 3. The product has technical specifications compliant with EN 12199 Resilient Floor Coverings (relief) for the European markets, in addition to technical specifications compliant with ASTM F1344 Rubber Floor Tile for the North American markets.

In addition, Artigo has been awarded with several international environmental certificates such as:

- GREENGUARD Gold: UL 2818-2022
- Blue Angel – DE-UZ 120
- A+
- GECA
- Eurofins IACG (Indoor Air Comfort Gold)
- Emission Class for building material M1



Figure 2 Artigo Certifications

The following United Nations Standard Products and Services Code (UNSPSC) and Construction Specifications Institute (CSI) classification apply to the product:

- UNSPSC: 30161705 Rubber Flooring
- CSI/CSC: 09 65 19.33 Rubber Tile Flooring

This declaration covers the Bollo BS rubber flooring with the commercial references: Bollo BS Classic and Bollo BS Strong, in the thicknesses 2.7 and 4 mm. An analysis has been performed on all products. The environmental impacts have a variation of  $\pm 5\%$  compared to the median.



### 1.3. Application

The products covered by this declaration are designed for use in schools, offices, hospitals, museums, indoor public spaces and other commercial environments. Artigo rubber flooring is classified in accordance with ISO 10874 (previously EN 685) and in reference to the FCSS (Floor Covering Standard Symbol) to be installed in the following areas of application:



Figure 3 Example of application.

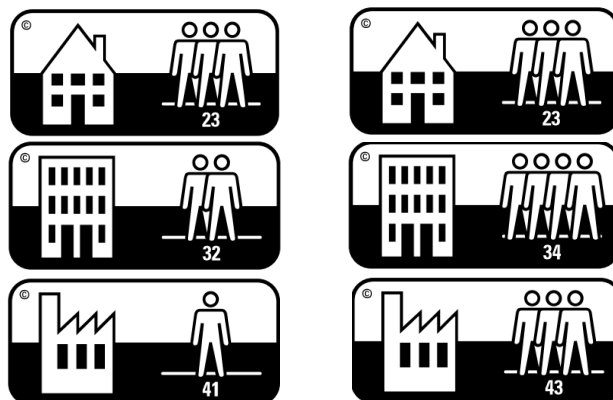


Table 1 Area of application for 2.7mm (left) and 4mm (right)

### 1.4. Declaration of Methodological Framework

For this project, a Cradle-to-Grave LCA approach has been applied, using a functional unit as reference. Specific data and background system have been modelled with generic data from the Ecoinvent 3.8 database. No known flows have been deliberately omitted from the calculation.

The Reference Service Life (RSL) and technical and functional performances described in this EPD are applicable as long as the product use complies with that defined by ISO 10874 (previously EN 685) and EN 12199 in accordance with the product's classification.

Information concerning the LCA rules including cut-off and allocation rules to this study may be found in Chapter 2.

### 1.5. Technical Requirements

Characteristics	Nominal Value	Unit	Standard
<b>Product Thickness</b>	2.7	mm	-
<b>Product Weight</b>	3.7	kg/m <sup>2</sup>	-
<b>Abrasion Resistance</b>	160	mm <sup>3</sup>	ISO 4649 (Met. A-5N)
<b>Tile Size</b>	0.5 x 0.5 1x1	m	-
<b>Hardness</b>	90	Shore A	ISO 48-4 (ISO 7619)
<b>Residual indentation</b>	0.08	mm	EN/ISO 24343-1 (EN 433)
<b>Fire behaviour</b>	Bfl – s1	class	EN 13501-1
<b>Slip resistance</b>	≥0.30(DS)	class	EN 13893

Table 2 Average product characteristics for 2,7 mm.



**BOLLO CLASSIC/BS CLASSIC AND BOLLO STRONG/BS STRONG**  
RESILIENT FLOOR COVERING

According to ISO 14025,  
EN 15804 and EN 16810

Characteristics	Nominal Value	Unit	Standard
<b>Product Thickness</b>	4.0	mm	-
<b>Product Weight</b>	5.40	kg/m <sup>2</sup>	-
<b>Abrasion Resistance</b>	160	mm <sup>3</sup>	ISO 4649 (Met. A-5N)
<b>Tile Size</b>	0.50 x 0.50 1 x 1	m	-
<b>Hardness</b>	90	Shore A	ISO 48-4 (ISO 7619)
<b>Residual indentation</b>	0.12	mm	EN/ISO 24343-1 (EN 433)
<b>Fire behaviour</b>	Bfl – s1	class	EN 13501-1
<b>Slip resistance</b>	≥0.30(DS)	class	EN 13893

Table 3 Average product characteristics for 4 mm.

### 1.6. Material Composition

Component	Material	Mass %	Availability	
			Recycled	Non-Renewable
<b>Binder</b>	Synthetic rubber	35		Non-Renewable - - Limited
<b>Filler</b>	Calcium Carbonate	10	Post industrial waste	
	Amorphous silica & Kaolin	39		Abundant Mineral
<b>Additives</b>	Various	11		Limited
<b>Pigments</b>	Titanium Dioxide	3		Limited
	Other Pigments	2		Limited

Table 4 Average composition (2.7 mm).

Component	Material	Mass %	Availability	
			Recycled	Non-Renewable
<b>Binder</b>	Synthetic rubber	35		Non-Renewable - - Limited
<b>Filler</b>	Calcium Carbonate	12	Post industrial waste	
	Amorphous silica & Kaolin	38		Abundant Mineral
<b>Additives</b>	Various	10		Limited
<b>Pigments</b>	Titanium Dioxide	3		Limited
	Other Pigments	2		Limited

Table 5 Average composition (4 mm).



**Synthetic rubbers:** SBR and BR: elastomeric materials with ideal flexibility for performance and comfort, suitable for various applications, including flooring

**Calcium Carbonate:** an abundant mineral found in all parts of the world. A recycled alternative material is available by sourcing post-industrial waste from marble processing.

**Kaolin:** obtained by quarrying the abundant mineral kaolinite.


**Amorphous silica:** an inorganic material characterized by its particulate structure, derived from abundant minerals. It is used for its positive contribution to mechanical properties.

**Titanium Dioxide & pigment:** a white pigment produced by an industrial chemical processing of rutile, a natural form of titanium dioxide. Other colour pigments are mainly iron oxide based.

**Various other additives:** auxiliary materials and agents needed for vulcanization

### 1.7. Manufacturing

The production of the rubber flooring is divided into the following stages:

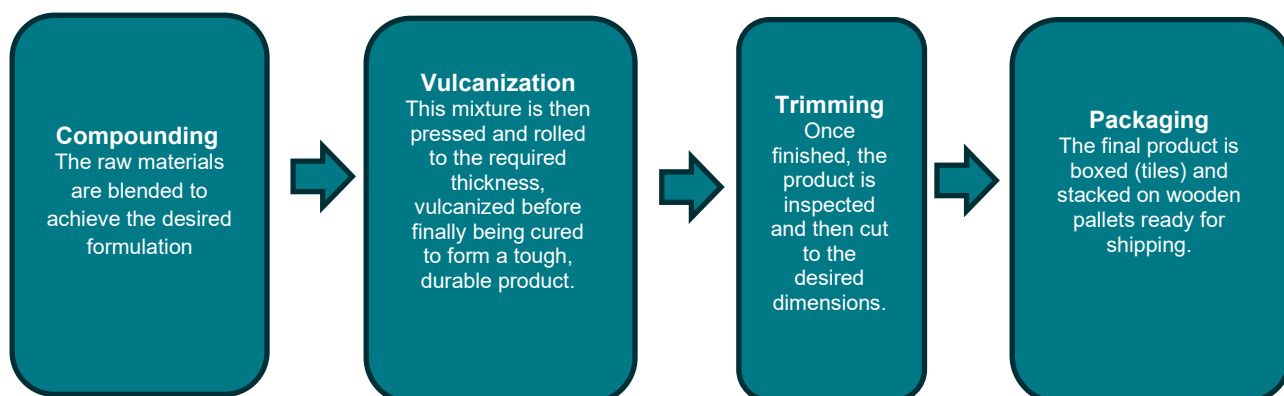

- The electricity demand is covered with both withdrawal from the electric grid and self production with the PV plant on the roof of the factory.



### 1.8. Packaging

All packaging materials are recyclable, however due to the variability of waste treatment on construction sites the hypotheses are divided into landfill, incineration and recycling, excluding wooden pallets for which reuse has been considered, has been retained for this EPD.

### 1.9. Transportation

Sales take place in Europe, Far East (China) and North America. For sales in Europe the product is delivered by truck, while for sales abroad it is shipped by sea from the port of Genoa, 50 km from the factory. On average every square meter of floor is transported as follow for each thickness:

Transport Distance 7.5-16T Truck:	424 km (2.7 mm); 453 km (4 mm)
Transport Distance 16-32T Truck:	423 km (2.7 mm); 452 km (4 mm)
Transoceanic freight:	6463 km (2.7 mm); 5014 km (4 mm)

### 1.10. Product Installation

The product is installed by hand using steel or carbide trowels. Approximately 300g/m<sup>2</sup> of an acrylic water-based low emission adhesive is used to glue the flooring in place. Following installation, a first cleaning is performed with a neutral detergent (0.0149 kg/m<sup>2</sup>) diluted in water (0.1999 kg/m<sup>2</sup>), either by mop or floor scrubber (electricity consumption: 0.065 kWh/ m<sup>2</sup>). For this LCA the following scenario has been used as 50% using the Mop and 50 % using machine. During the installation approximately 5% of the material is lost as off-cuts. In the modelling, in module A5, a contribution of 5% of modules A1- A3 + A4 was considered. The waste was assumed to be 50% landfilled and 50% recycled (for cement production). A distance of 50 km was assumed from the installation site to the disposal/recovery plant. The waste generated during the installation phase is the packaging of the finished product. For the simulation of the end-of-life of the cardboard, a 100% recycling fate was assumed, the treatment/disposal site was assumed to be 50 km from the installation site. For the Pallet, it was considered a reuse.

### 1.11. Use

The service lifetime of a floor covering for a certain application on a floor is too widespread to give one common number. For this EPD model the reference service life (RSL) is set to one year, according with EN 16810:2017. This means that all impacts for the use phase are based on the cleaning and maintenance model for one year. Depending on the area of use, the technical lifetime advised by the manufacturer and estimated time on the floor by customer, the service lifetime can be determined. The use phase impacts should be calculated with the foreseen service life to arrive at the total environmental impact. The service lifetime recommended by Artigo is 35 years.





### Cleaning and maintenance

For the calculations the following cleaning routine is considered:

- Daily cleaning (if necessary): simply clean with a soft brush.
- Routine cleaning (once a week or when necessary): clean with 0.7441 kg/m<sup>2</sup>\*year neutral detergent diluted in water or 0.0339 kg/m<sup>2</sup> \*year of alkaline detergent using a mop for small zone. For larger areas the cleaning is combined with an electric machine with an electricity consumption of 0.1444 kWh/m<sup>2</sup> \*year. The wet cleaning includes a water consumption of 10.374 kg/m<sup>2</sup> \*year. For LCA calculations, 50 routine cleanings per year and 2 extraordinary cleanings per year are assumed.

### Prevention of structural damage

To avoid excessive wear, usage should be restricted to the stated areas of application as outlined by the norm ISO 10874 (previously EN 685).

### Health aspects during usage

The products are compliant with BlueAngel, GREENGUARD Gold, Eurofins IACG specifications and to A+

### 1.12. End of life

It is assumed that no specific impacts should be attributed to the deconstruction phase, as this process is either carried out by hand or in the case of a building demolition, the product adds no impact to the overall impact of the demolition.

For the end-of-life phase, two different scenarios have been assumed and the results are indicated separately in module C:

1. 100% landfill disposal
2. 100% it was assumed that the material is recycled to the cement factory for use as CSS "End of Waste"

For Scenario 1 and 2, it has been assumed that 100% of the product is respectively sent to landfill or to cement factory at the end of its useful life. The transport between installation site and landfill/cement factory is by truck, with an estimated distance of 50 km.

### Reuse, Recycling, and Energy Recovery

Module D includes the avoided impacts of all net end-of-life flows. This encompasses the avoided impacts related to the percentages of material sent for recycling/recovery in modules A5 and C3. Specifically, the benefit typically derived from the production of thermal energy following the use of the flooring as CSS 'waste end of life' in cement production has been considered (with a fossil fuel substitution rate of 52.2%). As a precaution, the benefits arising from the energy recovery and material recovery of packaging in module A5 have not been taken into account.



According to ISO 14025,  
EN 15804 and EN 16810

2. Life Cycle Assessment Background Information

A full Life Cycle Assessment has been performed according to ISO 14040, ISO 14044 and in compliance with EN15804 and EN 16810.

2.1. Functional or Declared Unit

The functional unit is one square meter of installed product and the use stage is considered for one year of service life.

	Value	Unit
Functional Unit	1	m <sup>2</sup>
Conversion factor to 1 kg	0.270	-


Table 6 Functional Unit for 2.7 mm

	Value	Unit
Functional Unit	1	m <sup>2</sup>
Conversion factor to 1 kg	0.185	-

Table 7 Functional Unit for 4 mm



## 2.2. System Boundary

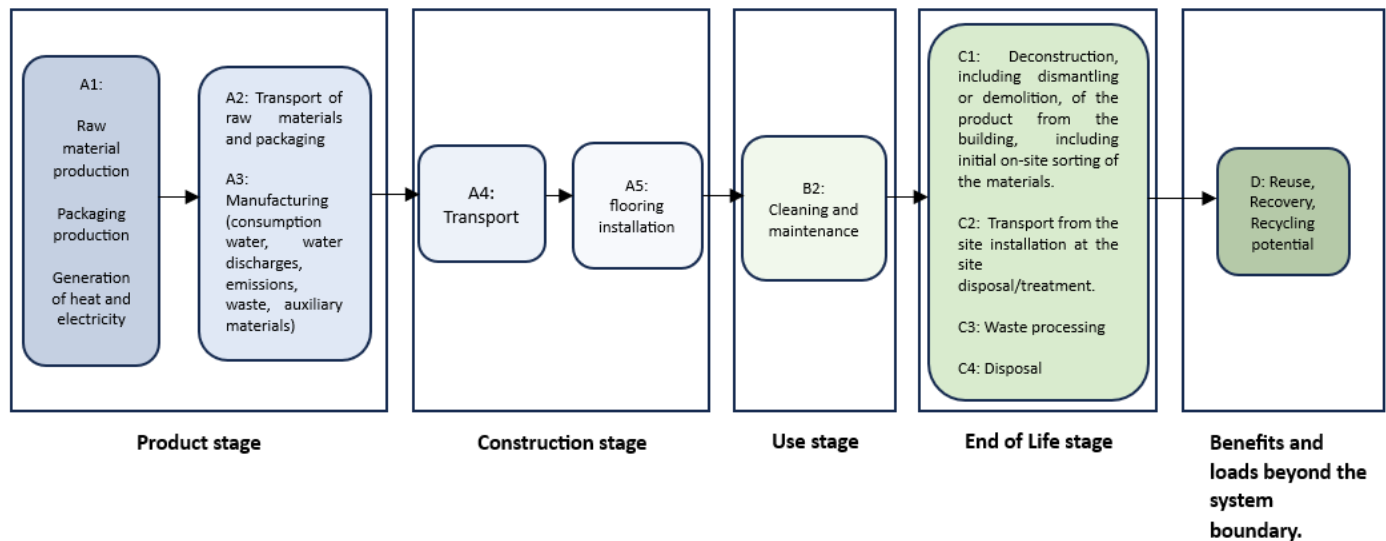

*Figure 4 Flow diagram of the Life Cycle Assessment*

This EPD is a cradle-to-grave analysis, consisting of the following steps:

**A1 – A3: Product stage** - includes the provision of all raw materials and their packaging, transport to the production site and energy consumption during the manufacturing of the product, as well as processing of waste generated by the factory.

**A4 – A5: Construction stage** - includes the transport from the factory to the final customer, packaging of the final product and the installation of the product, as well as all consumables and energy required, and processing of waste generated during the installation.

**B2: Use Stage (Maintenance of the floor)** – includes provision and transport of all materials, product and services related to the use phase of the product, as well as their related energy and water consumption, and the processing of any resulting waste. For floor coverings the modules B1, B3 to B7 are not relevant to the environmental performance of a product.

**C1 – C4: End of Life Stage (Deconstruction, Transport, Waste processing, Disposal).** Two different End of Life scenarios are declared:

- Scenario 1: 100% landfill disposal
- Scenario 2: it was assumed that the material would be sent to the cement factory for use as CSS "End of Waste".

**D: Benefits and loads beyond the system boundary (Reuse, Recovery, Recycling potential).**



### 2.3. Cut-off Criteria

---

The cut - off criteria shall be 1% of renewable and non-renewable primary energy usage and 1% of the total mass of that unit process. The total neglected input flows per module shall be a maximum of 5% of energy usage and mass.

In practice, in this assessment, all data from the production data acquisition are considered, i.e. all raw materials used as per formulation, use of water, electricity and other fuels, the required packaging materials, and all direct production waste. Transport data on all considered inputs and output material are also considered.

### 2.4. Data Sources

---

As a general rule, specific data derived from specific production processes or average data derived from specific production processes have been used as the first choice as a basis for calculating an EPD.

To model the life cycle of the product in question, the software SimaPro 9.5, developed by PRé, has been used in conjunction with the LCA database Ecoinvent v3.8.

There were no instances of missing data.

### 2.5. Data Quality

---

The requirements for data quality and LCA data are in accordance with the specifications of the PCR. All generic data has been checked for plausibility both internally and by the manufacturer.

**Temporal Coverage** – producer specific data is averaged over 1 year of production and from within the last 5 years or data from specific project. Generic data is taken from the Ecoinvent 3.8 database. Inputs to and outputs from the system are accounted for over a period of 100 years from the year for which the data set is deemed relevant.

**Technological Coverage** – the technological coverage of the data reflects the physical reality of the declared product.

**Geographical Coverage** – whenever possible, country specific data reflecting the reality of the Artigo supply chain has been used. If country specific data is unavailable, European regional data is used in preference to global data sources.

### 2.6. Period under Review

---

This study is based on primary collected for the year 2023.

### 2.7. Allocation

---

The overall values for the factory's material and energy consumptions during a period of one year have been divided by the annual production of each product to supply a value per square meter of flooring produced. All factory data is measured in square meters, and it is assumed that the process consumptions are governed by area of flooring processed rather than mass.

### 2.8. Comparability

---

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to EN 15804 and the building context, respectively the product-specific characteristics of performance, are taken into account.

### 3. Life Cycle Assessment Results

EPD Type	PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY
	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
	Raw material supply	Transport	Manufacturing	Transport from gate to site	Assembly/Install	Use	Maintenance	Repair	Replacement	Refurbishment	Building Operational Energy Use During Product Use	Building Operational Water Use During Product Use	Deconstruction	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling Potential
	X	X	X	X	X	MNR	X	MNR	MNR	MNR	MNR	MNR	X	X	X	X	X
Description of the system boundary (X= included in LCA; MNR=MODULE NOT RELEVANT for EN 16810)																	

#### 3.1. LCA results for 2.7 mm.

##### 3.1.1. Life Cycle Impact Assessment Analysis

Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3/s1-s2	C4/s1	D/s1	D/s2
GWP - total	kg CO <sub>2</sub> eq	8,20E+00	5,62E-01	8,15E-01	2,65E-01	0	2,98E-02	0	3,46E-01	-2,63E-02	-1,08E+00
GWP - Fossil	kg CO <sub>2</sub> eq	8,20E+00	5,62E-01	8,13E-01	2,60E-01	0	2,98E-02	0	3,46E-01	-2,63E-02	-1,08E+00
GWP - Biogenic	kg CO <sub>2</sub> eq	4,26E-03	1,73E-04	1,89E-03	-8,22E-03	0	9,10E-06	0	3,91E-04	-8,54E-06	-3,50E-04
GWP - luluc	kg CO <sub>2</sub> eq	2,65E-03	4,91E-06	6,87E-04	1,30E-02	0	2,88E-07	0	2,65E-06	-7,27E-07	-2,98E-05
ODP	kg CFC11 eq	9,78E-06	1,33E-07	5,34E-07	1,45E-08	0	7,05E-09	0	3,43E-09	-3,41E-09	-1,40E-07
AP	mol H <sup>+</sup> eq	4,50E-02	3,83E-03	4,23E-03	1,53E-03	0	1,33E-04	0	1,81E-04	-3,37E-05	-1,38E-03
EP - freshwater	kg P eq	2,11E-04	2,92E-07	2,28E-05	2,44E-05	0	2,36E-08	0	7,79E-08	-1,79E-08	-7,33E-07
EP - marine	kg N eq	6,48E-03	1,23E-03	6,83E-04	6,11E-04	0	4,85E-05	0	5,15E-04	-8,18E-06	-3,36E-04
EP - terrestrial	mol N eq	7,26E-02	1,36E-02	7,54E-03	2,97E-03	0	5,34E-04	0	8,31E-04	-8,92E-05	-3,66E-03
POCP	kg NMVOC eq	2,47E-02	3,51E-03	2,66E-03	1,33E-03	0	1,39E-04	0	3,17E-04	-3,31E-05	-1,36E-03
ADPE	kg Sb eq	1,33E-05	2,33E-08	1,44E-06	4,17E-07	0	1,48E-09	0	8,69E-10	-3,09E-11	-1,27E-09
ADPF	MJ	1,86E+02	7,99E+00	1,93E+01	4,75E+00	0	4,24E-01	0	2,45E-01	-4,29E-01	-1,76E+01
WDP	m3 eq	5,15E+00	-1,34E-03	6,22E-01	2,01E-01	0	-3,47E-05	0	3,69E-04	-6,46E-04	-2,65E-02

Caption: GWP - total = global warming potential; GWP - fossil = global warming potential (fossil fuel only); GWP - biogenic = global warming potential (biogenic); GWP - luluc = global warming potential (land use only); ODP = ozone depletion; AP = acidification terrestrial and freshwater; EP - freshwater = eutrophication potential (freshwater); EP - marine = eutrophication potential (marine); EP - terrestrial = eutrophication potential (terrestrial); POCP = photochemical ozone formation; ADPE = abiotic depletion potential (element); ADPF = abiotic depletion potential (fossil); WDP = water scarcity

Table 8 Results of the LCA – Environmental Impacts for 2,7 mm.



## 3.1.2. Resource use

Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3/s1-s2	C4/s1	D/s1	D/s2
PERE	MJ	1,20E+01	9,11E-03	7,69E-01	3,02E-01	0	4,75E-04	0	2,26E-02	-6,27E-04	-2,57E-02
PERM	MJ	5,48E+00	3,02E-03	3,77E-01	4,95E-01	0	1,59E-04	0	3,78E-03	-6,99E-05	-2,87E-03
PERT	MJ	1,75E+01	1,21E-02	1,15E+00	7,97E-01	0	6,35E-04	0	2,64E-02	-6,97E-04	-2,86E-02
PENRE	MJ	8,40E+01	4,14E+00	8,13E+00	3,04E+00	0	2,21E-01	0	1,45E-01	-4,28E-01	-1,76E+01
PENRM	MJ	1,02E+02	3,85E+00	1,12E+01	1,73E+00	0	2,03E-01	0	9,97E-02	-9,79E-04	-4,01E-02
PENRT	MJ	1,86E+02	7,99E+00	1,93E+01	4,77E+00	0	4,24E-01	0	2,45E-01	-4,29E-01	-1,76E+01
SM	Kg	3,70E-01	0	0	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0	0	0
FW	m <sup>3</sup>	1,12E-01	2,25E-05	1,47E-02	5,84E-03	0	2,56E-06	0	8,57E-05	-2,53E-05	-1,04E-03

Caption: PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

Table 9 Results of the LCA – Resource Use for 2,7 mm.

## 3.1.3. Output Flows and Waste Categories

Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3/s1-s2	C4/s1	D/s1	D/s2
HWD	kg	2,15E-02	1,99E-05	1,08E-03	3,13E-06	0,00E+00	1,12E-06	0	5,54E-07	-5,51E-07	-2,26E-05
NHWD	kg	6,97E-01	3,32E-04	5,15E-02	2,68E-02	0,00E+00	3,20E-05	0	3,70E+00	-4,98E-05	-2,04E-03
RWD	kg	2,87E-04	5,71E-05	3,88E-05	1,41E-05	0,00E+00	3,02E-06	0	1,85E-06	-1,00E-07	-4,12E-06
CRU	kg	0	0	0	0	0	0	0	0	0	0
MFR	kg	6,85E-01	0	1,30E-01	0	0	0	3,70E+00	0	0	0
MER	kg	0	0	0	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0	0	0	0

Caption: HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy

Table 10 Results of the LCA – Output Flows and Waste for 2,7 mm.

## 3.1.4. Biogenic Carbon Content

Biogenic carbon content	Value	Unit
Biogenic carbon content in product	0,041	kg C
Biogenic carbon content in accompanying packaging	0,047	kg C
Note: 1 kg of biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>		

Table 11 Results of the LCA – Information describing the biogenic carbon content at the factory gate for 2,7 mm.

## 3.2. LCA results for 4 mm.

### 3.2.1. Life Cycle Impact Assessment Analysis

Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3/s1-s2	C4/s1	D/s1	D/s2
GWP - total	kg CO <sub>2</sub> eq	1,15E+01	6,51E-01	8,23E-01	2,65E-01	0	4,72E-02	0	5,05E-01	-3,84E-02	-1,57E+00
GWP - Fossil	kg CO <sub>2</sub> eq	1,15E+01	6,51E-01	8,21E-01	2,60E-01	0	4,72E-02	0	5,05E-01	-3,83E-02	-1,57E+00
GWP - Biogenic	kg CO <sub>2</sub> eq	-2,54E-03	2,04E-04	1,65E-03	-8,22E-03	0	1,44E-05	0	5,70E-04	-1,25E-05	-5,11E-04
GWP - luluc	kg CO <sub>2</sub> eq	3,80E-03	5,37E-06	6,94E-04	1,30E-02	0	4,56E-07	0	3,87E-06	-1,06E-06	-4,35E-05
ODP	kg CFC11 eq	1,45E-05	1,56E-07	3,85E-07	1,45E-08	0	1,12E-08	0	5,01E-09	-4,97E-09	-2,04E-07
AP	mol H <sup>+</sup> eq	6,55E-02	3,24E-03	4,30E-03	1,53E-03	0	2,11E-04	0	2,65E-04	-4,92E-05	-2,02E-03
EP - freshwater	kg P eq	3,00E-04	3,37E-07	2,24E-05	2,44E-05	0	3,73E-08	0	1,14E-07	-2,61E-08	-1,07E-06
EP - marine	kg N eq	9,30E-03	1,15E-03	8,59E-04	6,11E-04	0	7,69E-05	0	7,51E-04	-1,19E-05	-4,90E-04
EP - terrestrial	mol N eq	1,04E-01	1,27E-02	8,10E-03	2,97E-03	0	8,46E-04	0	1,21E-03	-1,30E-04	-5,34E-03
POCP	kg NMVOC eq	3,58E-02	3,29E-03	2,61E-03	1,33E-03	0	2,20E-04	0	4,62E-04	-4,83E-05	-1,98E-03
ADPE	kg Sb eq	2,27E-05	2,83E-08	1,36E-06	4,17E-07	0	2,35E-09	0	1,27E-09	-4,51E-11	-1,85E-09
ADPF	MJ	2,64E+02	9,30E+00	1,96E+01	4,75E+00	0	6,72E-01	0	3,58E-01	-6,26E-01	-2,57E+01
WDP	m3 eq	7,30E+00	-1,56E-03	6,34E-01	2,01E-01	0	-5,53E-05	0	5,39E-04	-9,44E-04	-3,87E-02

Caption: GWP - total = global warming potential; GWP - fossil = global warming potential (fossil fuel only); GWP - biogenic = global warming potential (biogenic); GWP - luluc = global warming potential (land use only); ODP = ozone depletion; AP = acidification terrestrial and freshwater; EP - freshwater = eutrophication potential (freshwater); EP - marine = eutrophication potential (marine); EP - terrestrial = eutrophication potential (terrestrial); POCP = photochemical ozone formation; ADPE = abiotic depletion potential (element); ADPF = abiotic depletion potential (fossil); WDP = water scarcity

Table 12 Results of the LCA – Environmental Impacts for 4 mm.

### 3.2.2. Resource use

Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3/s1-s2	C4/s1	D/s1	D/s2
PERE	MJ	1,39E+01	1,07E-02	7,76E-01	3,02E-01	0	7,53E-04	0	3,30E-02	-9,15E-04	-3,75E-02
PERM	MJ	6,81E+00	3,54E-03	3,84E-01	4,95E-01	0	2,53E-04	0	5,52E-03	-1,02E-04	-4,18E-03
PERT	MJ	2,07E+01	1,42E-02	1,16E+00	7,97E-01	0	1,01E-03	0	3,85E-02	-1,02E-03	-4,17E-02
PENRE	MJ	1,21E+02	7,50E+00	9,02E+00	3,17E+00	0	5,42E-01	0	2,97E-01	-6,25E-01	-2,56E+01
PENRM	MJ	1,43E+02	1,81E+00	1,06E+01	1,59E+00	0	1,29E-01	0	6,03E-02	-9,38E-04	-3,84E-02
PENRT	MJ	2,64E+02	9,30E+00	1,96E+01	4,77E+00	0	6,72E-01	0	3,58E-01	-6,26E-01	-2,57E+01
SM	Kg	5,40E-01	0	0	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0	0	0
FW	m <sup>3</sup>	1,56E-01	2,57E-05	1,49E-02	5,84E-03	0	4,04E-06	0	1,25E-04	-3,69E-05	-1,51E-03

Caption: PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

Table 13 Results of the LCA – Resource Use for 4 mm

### 3.2.3. Output Flows and Waste Categories

Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3/s1-s2	C4/s1	D/s1	D/s2
HWD	kg	2,16E-02	2,42E-05	9,04E-05	3,13E-06	0	1,77E-06	0	8,09E-07	-8,04E-07	-3,30E-05
NHWD	kg	1,16E+00	3,84E-04	6,21E-02	2,68E-02	0	5,06E-05	0	5,40E+00	-7,26E-05	-2,98E-03
RWD	kg	3,97E-04	6,65E-05	3,95E-05	1,41E-05	0	4,79E-06	0	2,70E-06	-1,47E-07	-6,01E-06
CRU	kg	0	0	0	0	0	0	0	0	0	0
MFR	kg	6,85E-01	0	1,72E-01	0	0	0	5,40E+00	0	0	0
MER	kg	0	0	0	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0	0	0	0

Caption: HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy

*Table 14 Results of the LCA – Output Flows and Waste for 4 mm.*

### 3.2.4. Biogenic Carbon Content

Biogenic carbon content	Value	Unit
Biogenic carbon content in product	0,065	kg C
Biogenic carbon content in accompanying packaging	0,047	kg C
Note: 1 kg of biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>		

*Table 15 Results of the LCA – Information describing the biogenic carbon content at the factory gate for 4 mm.*

## 4. Additional Environmental Impact Indicators

The following tables contains the additional environmental impact indicators according to the European Standard EN15804+A2.

Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3/s1-s2	C4/s1	D/s1	D/s2
PM	[Disease incidences]	3,47E-07	3,84E-08	3,52E-08	1,19E-08	0	1,98E-09	0	4,50E-09	-7,08E-11	-2,90E-09
IR	kBq U-235 eq	2,74E-01	3,47E-02	3,51E-02	1,62E-02	0	1,84E-03	0	1,58E-03	-7,47E-05	-3,06E-03
ETF-fw	CTUe	5,83E+01	1,90E+00	4,34E+00	2,95E+00	0	1,01E-01	0	1,27E+00	-5,82E-02	-2,39E+00
HTP-c	CTUh	4,07E-09	2,15E-11	2,25E-10	5,40E-11	0	1,16E-12	0	8,40E-13	-7,22E-13	-2,96E-11
HTP-nc	CTUh	4,93E-09	2,39E-10	9,06E-10	2,06E-10	0	1,31E-11	0	4,29E-10	-4,18E-12	-1,71E-10
SQP	dimensionless	3,73E+01	2,14E-02	2,45E+00	1,10E+00	0	1,30E-03	0	6,50E-01	-3,93E-04	-1,61E-02

Caption: PM = Particulate matter emissions; IR = Ionizing radiation, human health; ETF-fw = Eco-toxicity (freshwater); HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Soil quality potential/ Land use related impacts

Table 16 Results of the LCA – Additional environmental impacts for 2.7 mm.

Indicator	Unit	A1-A3	A4	A5	B2	C1	C2	C3/s1-s2	C4/s1	D/s1	D/s2
PM	[Disease incidences]	5,22E-07	4,63E-08	3,57E-08	1,19E-08	0	3,13E-09	0	6,56E-09	-1,03E-10	-4,23E-09
IR	kBq U-235 eq	3,74E-01	4,04E-02	3,58E-02	1,62E-02	0	2,91E-03	0	2,30E-03	-1,09E-04	-4,47E-03
ETF-fw	CTUe	8,76E+01	2,21E+00	5,13E+00	2,95E+00	0	1,61E-01	0	1,85E+00	-8,50E-02	-3,49E+00
HTP-c	CTUh	5,89E-09	2,59E-11	1,95E-10	5,40E-11	0	1,84E-12	0	1,23E-12	-1,05E-12	-4,32E-11
HTP-nc	CTUh	6,94E-09	2,91E-10	9,18E-10	2,06E-10	0	2,08E-11	0	6,26E-10	-6,10E-12	-2,50E-10
SQP	dimensionless	5,10E+01	2,50E-02	2,45E+00	1,10E+00	0	2,07E-03	0	9,49E-01	-5,74E-04	-2,35E-02

Caption: PM = Particulate matter emissions; IR = Ionizing radiation, human health; ETF-fw = Eco-toxicity (freshwater); HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Soil quality potential/ Land use related impacts

Table 17 Results of the LCA – Additional environmental impacts for 4 mm.



## 5. LCA Interpretation

The analysis of the results has been conducted with due consideration to the assumptions and limitations outlined in the Environmental Product Declaration (EPD), encompassing both methodological and data-related constraints. The use phase results are based on a one-year use scenario.

By analyzing the entire life cycle of the product, the LCA study highlighted that the production phase (A1-A3) overwhelmingly influences all mandatory and additional environmental impact indicators. This predominant contribution is primarily attributed to the production of raw materials. Conversely, a considerably lesser impact stems from the utilization of thermal and electrical energy during the manufacturing process.

## 6. Additional Environmental Information

### 6.1. Environment and Health During Manufacturing

Artigo's factory conforms to the ISO 14001 Environmental Management Systems and ISO 50001 Energy Management Systems.

### 6.2. Environment and Health During Installation

The manufacturer's guidelines should be adhered to during the installation of this product.

### 6.3. Extraordinary Effects

#### Fire

- ASTM E 648 Critical radiant flux  $\geq 0.45 \text{ W/cm}^2$  (Class 1)
- ASTM E 662 Smoke Density  $< 450$
- EN 13501-1 Fire Behavior  $B_{fl} - s1$

#### Water

- The product is impermeable to water.

#### Mechanical Destruction

Mechanical damage does not chemically alter the product.





According to ISO 14025,  
EN 15804 and EN 16810

### 6.4. Environmental Activities and Certifications

- GREENGUARD Gold: UL 2818-2022
- Blue Angel – DE-UZ 120
- A+
- GECA
- Eurofins IACG (Indoor Air Comfort Gold)
- Emission Class for building material M1



The total content of recycled, recovered, or by-product material is 10%, and it has been determined using a methodology based on mass balance, which tracks the physical material flows.

### 6.5. Further Information

Further information concerning the product may be found at the company website for Europe [www.artigo.com](http://www.artigo.com) and for North America [www.mondocontractflooring.com](http://www.mondocontractflooring.com)

## 7. Supporting Documentation

All documentation necessary to confirm the data provided in this EPD has been submitted to the critical reviewer.

## 8. Disclaimers to the declaration of core and additional environmental impact indicators

According to the “ILCD Handbook: Recommendations for Life Cycle Impact Assessment in the European context” recommended characterization models and associated characterization factors are classified according to their quality into three levels:

- Type 1 (recommended and satisfactory);
- Type 2 (recommended but it need of some improvements);
- Type 3 (recommended, but to applied with caution).

ILCD classification	Indicator	Disclaimer
ILCD Type 1	Global warming potential (GWP)	None
	Depletion potential of the stratospheric ozone layer (ODP)	None
	Potential incidence of disease due to PM emission (PM)	None
ILCD Type 2	Acidification potential, Accumulated Exceedance (AP)	None
	Eutrophication potential, Fraction of nutrients reaching freshwater end compartment (EP-freshwater)	None
	Eutrophication potential, Fraction of nutrients reaching marine end compartment (EP-marine)	None
	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	None
	Formation potential of tropospheric ozone (POCP)	None
	Potential Human exposure efficiency relative to U235 (IRP)	1
ILCD Type 3	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	2
	Abiotic depletion potential for fossil resources (ADP-fossil)	2
	Water (user) deprivation potential, deprivation-weighted water consumption (WDP)	2
	Potential Comparative Toxic Unit for ecosystems (ETP-fw)	2
	Potential Comparative Toxic Unit for humans (HTP-c)	2
	Potential Comparative Toxic Unit for humans (HTP-nc)	2
	Potential Soil quality index (SQP)	2
Disclaimer 1 - This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.		
Disclaimer 2 - The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.		

Table 18 Classification of disclaimers to the declaration of core and additional environmental impact indicators.



## 9. References

---

### REPORTING STANDARDS

Database Ecoinvent v3.8 ([www.ecoinvent.org](http://www.ecoinvent.org))

EN 15804:2012+A2:2019+AC: Sustainability of construction works – Environmental Product Declarations – Core rules for the product category of construction products

EN 16810:2017 Resilient, textile and laminate floor coverings - Environmental product declarations - Product category rules

ISO 14025:2011-10: Environmental labels and declarations – Type III environmental declarations – Principles and procedures

ISO 14040:2021 – Environmental management – Life cycle assessment - Principles and framework

ISO 14044:2021 – Environmental management – Life cycle assessment – Requirements and guidelines

Life Cycle Assessment – code: LCA004, rev.02 of 16<sup>th</sup> May 2025 released by Artigo S.p.a

EN 12199 – Resilient floor coverings: Specifications for homogeneous and heterogeneous relief rubber floor coverings.



### 10. Contact Information

	<p><b>Publisher</b></p> <p>UL ECO-INSTITUT GmbH Sachsenring 69 50677 Cologne Germany</p> <p>Tel +49 (0)221 931 245 30 Fax +49 (0)221 931 245 33 Mail <a href="mailto:environment@ul.com">environment@ul.com</a> Web <a href="http://www.ul.com">www.ul.com</a></p>
	<p><b>LCA Consultancy</b></p> <p>Tetis Institute Srl Via Gropallo 4/19 16122 Genova (GE) Italy</p> <p>Tel (+39) 010.335.2906 Fax - Mail <a href="mailto:info@tetisinstitute.it">info@tetisinstitute.it</a> Web <a href="http://www.tetisinstitute.it">www.tetisinstitute.it</a></p>
	<p><b>Owner of the Declaration</b></p> <p>Via Cortemilia 32 - Loc. Carpeneto 17014 Cairo Montenotte (SV) Italy</p> <p>Tel (+39) 019509011 Fax (+39) 019505513 Mail <a href="mailto:sede@artigo.com">sede@artigo.com</a> Web <a href="http://www.artigo.com">www.artigo.com</a> <a href="http://www.mondocontractflooring.com">www.mondocontractflooring.com</a></p>

